

MINIPRESS.RU

Supplier of pharmaceutical equipment in Russia
Founded in 1999

RUSSIA, 115035, MOSCOW, 17 PIATNITSKAYA St.

+7(495)364-38-08

info@minipress.ru

www.minipress.ru

Commercial proposal

Compiled:	15.02.2018
Valid:	12 month
Author:	Roman Tsubulsky


Vacuum powder conveyor with vortex air pump ZK-06

DESCRIPTION

The system of vacuum transportation of powders and loose products in which a pneumatic vacuum and vortex air pumps are used. With this vacuum transfer system, bulk materials and powders can be fed from a storage tank to mixers, reactors, hoppers, tablet presses, packaging lines, vibrating screens and other types of pharmaceutical and chemical equipment. The use of this device will facilitate the laboriousness of work processes, put an end to contamination with powder and ensure compliance with GMP requirements.

Productivity from 1000 to 6000 kg per hour. The weight of the kit is 800 kg. Made of high quality stainless steel. We provide detailed instructions for the installation of equipment and drawings of connecting dimensions. Before shipping to the customer, machine is checked and tested in the production. Completeness and working capacity is guaranteed. We maintain a stock of parts and consumables in the warehouse. The price is indicated taking into account customs payments in Russia and delivery to the city of the client.

MANUFACTURER - CHINA

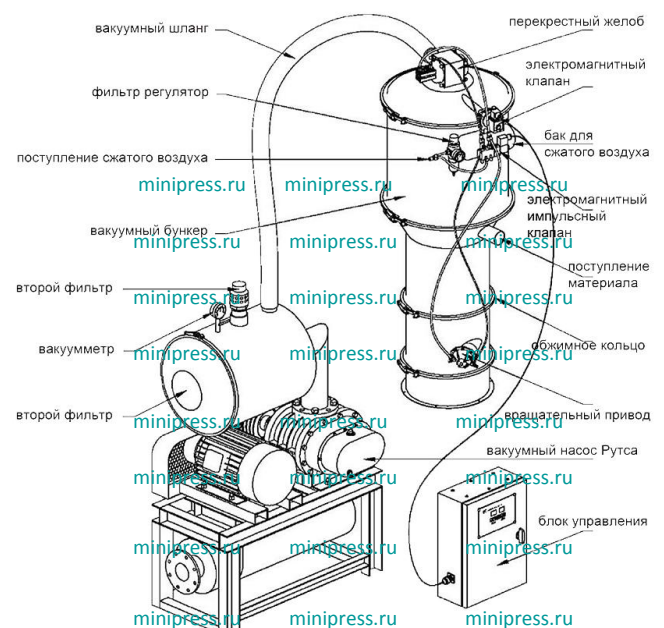

ZKS-5/6/7 Принципиальная схема
Рисунок 3

MINIPRESS.RU

SPECIFICATIONS

Vacuum powder conveyor with vortex air pump "ZK-06"

Maximum productivity in ideal conditions: from 1000 to 6000 kg per hour

Air consumption: 4000 liters per minute

Power: 3 to 7 kW

Diameter of the base: 520 mm

Transporter height: 1300 mm

Power supply: 380V

Weight: 720 kg

Shipping Weight: 800 kg

 www.minipress.ru

ADDITIONAL INFORMATION

The vacuum system uses a vortex air pump that extracts air. The inlet of the nipple for material absorption and the whole system is made to be in a vacuum state. Bulk materials are absorbed into the branch pipe with ambient air and form a common flow. Passing the absorption tube, the materials enter the hopper, where air and material are separated. Divided materials are sent to the device receiving the materials. In the vacuum feeder unit, a device for opposing blowing with compressed air is installed. Every time the materials are unloaded, the compressed air blows the filter from the opposite side. The powder attached to the filter surface is deflated to ensure a normal absorption of the material. The manufacturer provides non-standard connectors for the vacuum conveyor and equipment, the results in the complete transmission of the attached circuit and no leakage, ensures the quality and cleanliness of the working area. Transportable materials: coffee, dextrose, rice, acetylsalicylic acid sodium hydroxide, powdered milk powder, sugar, crushed alumina, detergents, bird feather, tea, aluminum powder, dry paint, fish meal, nuts, wheat flour, boric acid, powder nickel, gelatin powder, pea plastic granules, beer malt, yeast, coffee beans, gunpowder, potato flour, fertilizers, cocoa powder, dry glue, all kinds of powder materials. Vacuum filler is a vacuum filling device, using as a vacuum source a pneumatic vacuum pump. With the help of vacuum, the fillers can be fed directly from the container to the mixer, reactor, hopper, flat press, investment device, vibrating sieve, drageeing boiler and disintegrator. The use of this device can ease the intensity of work loads, put an end to contamination with powder and ensure compliance with GMP requirements. Compressed air enters the vacuum pump and the discharge hopper. Vacuum filler forms an air flow under vacuum. Controlled by this air flow material is fed into the vacuum hopper through the hose. After a while (the time needed for the process described above) the compressed air is separated, the pneumatic vacuum pump can not generate (generate) a vacuum and a discharge hopper and, controlled by the pneumatic cylinder, opens. Vacuum in the vacuum filler disappears, and the material is automatically fed to the press and the investment device. At the same time, compressed air, trapped in an air bag, blows the filter in the opposite direction, which leads to automatic cleaning of the filter. After a while, the whole process begins and passes a new cycle. Vacuum filler is equipped with automatic control of the level of the feed material.

PRODUCTION TIME 30-40 DAYS
ESTIMATED DELIVERY TIME 30-40 DAYS

PRICE 15254,24 USD
VAT 2745,76 USD

VALUE 18000.00 USD

Payment is made in rubles to the account in Moscow at the rate of the RF Central Bank

OUR SERVICES FOR CLIENTS:

1) TRAINING TO WORK WITH VACUUM TRANSPORTERS OF POWDERS.

To all our customers who purchased equipment, we provide literature on work with the transportation of powders and wiring diagrams. We carry out consultations by phone and by correspondence, we help to solve arising difficulties at manufacture on our equipment. We supply spare parts and consumables. We render services in the help on realization of the equipment of transportation of powder used.

2) WE ACCESS THE PRODUCTION BY VACUUM SYSTEMS OF POWDER TRANSFER.

We have a large range of additional equipment for working with powder and loose products. At the request of the client, we will select a model for installation in a line or for a separate machine for picking up powders from containers, or feeding powders into bunkers of devices.

3) SPARE PARTS SUPPLY

We cooperate with manufacturers of vacuum conveyors and we are engaged in deliveries of spare parts for the equipment bought in our company.



Owner and supervisor
ROMAN TSIBULSKY